



OLLN4 Series 4' LED Surface Mount w/ Motion Sensors

Project: _____
 Fixture Type: _____
 Catalog Number: _____
 Notes: _____



Perfect for stairwells and hallways or any other application that would benefit from increased efficiency, security and safety. The OLLN4 LED Surface Mount luminaire has dual motion sensors that can be aimed independently to target specific areas. Consuming only 5 watts of power in standby mode, the OLLN4 increases its light output to 1800 lumens when motion has been detected ensuring that you have the illumination you desire when and where you need it.

Performance Overview
Watts: 25W (Full Operation) / 5W (Standby Mode)
CCT: 5000K
Lumens: 1800
CRI: 80
Input Rating - AC: 100~277V; 50/60Hz
Output Rating - DC: 36~42V; 1.4A
Max. Operating Temp: 40°C
Min. Operating Temp: -20°C
Detection Zone: 360°/8m Diameter (when mounted at a height of 2.5—3m)
Time Delay: Programmable From 5 Seconds To 5 Minutes
UL Listed. IP54 Rated. Suitable for Damp Locations
Lifetime: 50,000 Hours
Limited Warranty: 5 Years
Construction
Electro-galvanized Metal SECC with 120g/mm Zinc Density with PR12 Powder Coating
High Impact Plastic Lens



Adjustable Sensors





Ordering Information

ITEM	MODEL	SIZE	CCT	LUMEN	WATTS	LM/W	STANDBY WATTS
399526	OLLN4-25C-UNV-M	4'	5000K	1800	24	75	5






OLLN4 Series 4' LED Surface Mount w/ Motion Sensors

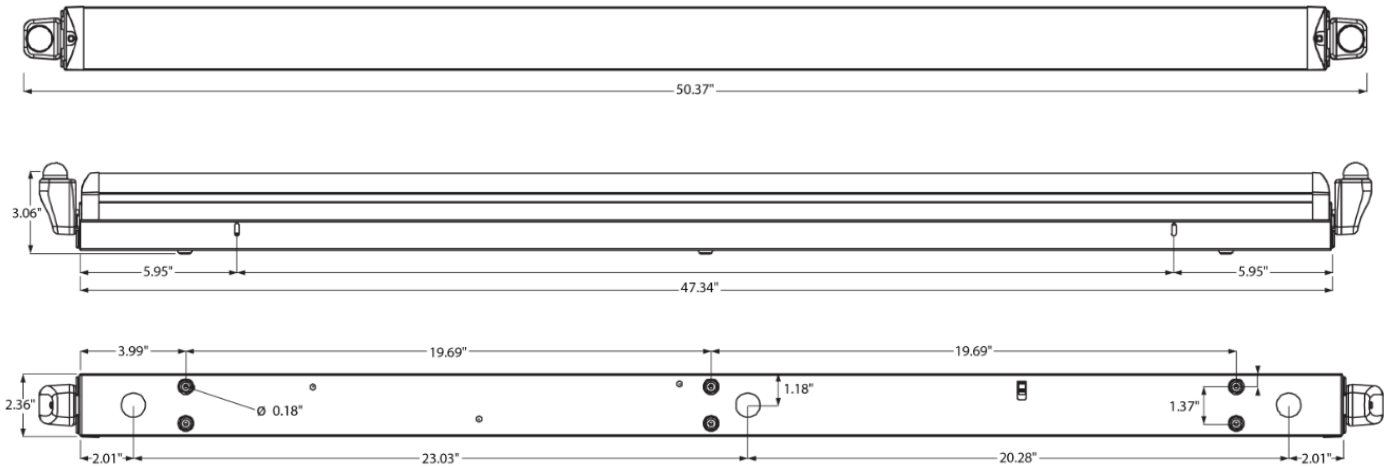

(L) 50.35" (1279mm)
(W) 2.36" (60mm)
(H) 3.43" (87mm)
Weight: 5.2 lbs.

Photometrics for OLLN4-25C-UNV-M
IES Files available upon request

Polar Graph

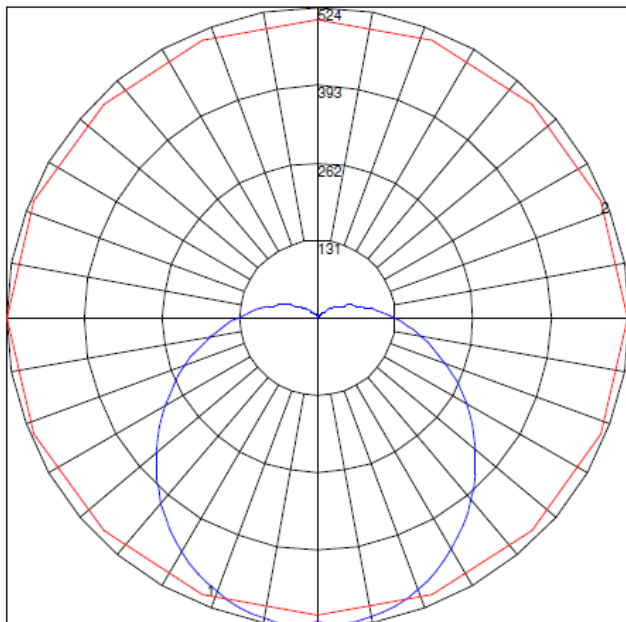

Maximum Candela = 524 Located At Horizontal Angle = 180, Vertical Angle = 2.5
1 - Vertical Plane Through Horizontal Angles (180 - 0) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC RW	80				70				50			30			10			0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	
0	117	117	117	117	113	113	113	113	107	107	107	100	100	100	95	95	95	92
1	105	99	94	90	101	96	91	87	90	86	83	85	82	79	80	77	75	72
2	95	85	78	71	91	83	76	70	78	72	67	73	68	64	69	65	62	59
3	86	74	66	59	82	72	64	57	68	61	55	64	58	53	60	56	51	49
4	78	66	56	49	75	64	55	48	60	53	47	57	50	45	54	48	44	41
5	72	58	49	42	69	57	48	41	54	46	40	51	44	39	48	42	38	35
6	66	52	43	36	64	51	42	36	48	41	35	46	39	34	43	38	33	31
7	61	47	38	32	59	46	38	32	44	36	31	42	35	30	40	34	29	27
8	57	43	34	28	55	42	34	28	40	33	27	38	32	27	36	30	26	24
9	53	40	31	25	51	39	31	25	37	30	25	35	29	24	34	28	23	22
10	50	36	28	23	48	36	28	23	34	27	22	33	26	22	31	25	21	19

