



OLLN4 Series 4' LED Surface Mount

Project: _____
 Fixture Type: _____
 Catalog Number: _____
 Notes: _____



Perfect for stairwells and hallways or any other application that would benefit from increased efficiency, security and safety. The OLLN series is made from a solid metal housing and is protected by a polycarbonate lens. The OLLN series can now be ordered with or without dual motion sensors that can be independently aimed to target specific areas. When no motion is being detected the fixture goes into standby mode, using only a fraction of the energy. When motion has been detected the fixture goes into hi mode to ensure that you have the illumination you need. This product can also be used as emergency lighting in case of a power failure. We offer a battery backup option that will keep the fixture working for up to 90 minutes after the power goes out.

Performance Overview	
Watts:	26
CCT:	5000K
Lumens:	3000
CRI:	80
Input Rating - AC:	100~277V; 50/60Hz
Output Rating - DC:	36~42V; 1.4A
Max. Operating Temp:	40°C
Min. Operating Temp:	-20°C
Detection Zone:	360°/8m Diameter (when mounted at a height of 2.5—3m)
Time Delay:	Programmable From 5 Seconds To 5 Minutes
UL Listed. IP54 Rated. Suitable for Damp Locations	
Lifetime:	50,000 Hours
Limited Warranty:	5 Years
Construction	
Electro-galvanized Metal SECC with 120g/mm Zinc Density with PR12 Powder Coating	
High Impact Polycarbonate Lens	

Available Adjustable Sensors





Ordering Information

ITEM	MODEL	SIZE	CCT	LUMEN	WATTS	LM/W	STANDBY WATTS	Motion Sensor	Battery Backup
399725	OLLN4-30C-UNV	4'	5000K	3000	26	115.4	N/A		
399726	OLLN4-30N-UNV	4'	4000K	3000	26	115.4	N/A		
399723	OLLN4-30C-UNV-M	4'	5000K	3000	26	115.4	8.6	✓	
399724	OLLN4-30N-UNV-M	4'	4000K	3000	26	115.4	8.6	✓	
399727	OLLN4-30C-UNV-M-EB	4'	5000K	3000	26	115.4	10.5	✓	✓






OLLN4 Series 4' LED Surface Mount

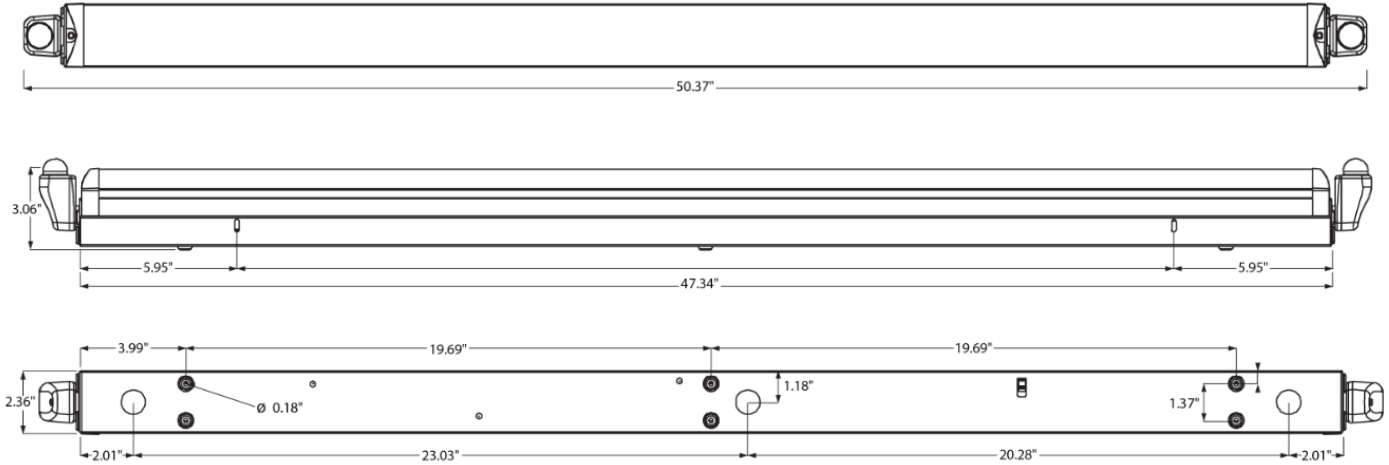

(L) 50.35" (1279mm)
(W) 2.36" (60mm)
(H) 3.43" (87mm)
Weight: 5.2 lbs.

***NOTE: Photometrics for OLLN4-25C-UNV-M IES Files Available Upon Request**

CANDELA DISTRIBUTION

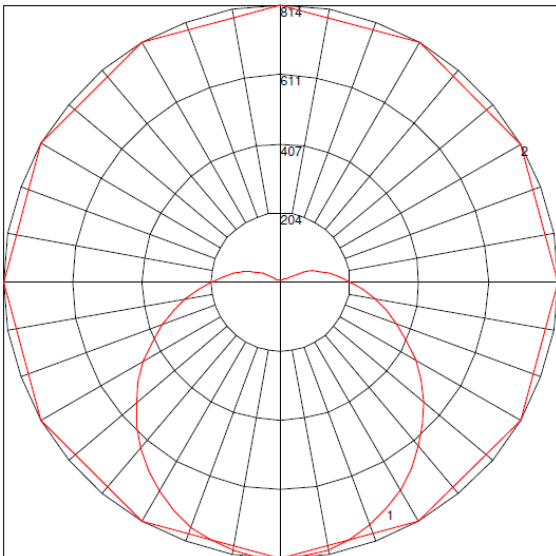

**IES INDOOR REPORT
PHOTOMETRIC FILENAME: 399726 OLLN4-30C-UNV-M.IES**

COEFFICIENTS OF UTILIZATION-ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	117	117	117	117	114	114	114	114	107	107	107	101	101	101	95	95	95	93
1	105	99	94	90	101	96	92	88	91	87	84	85	82	80	81	78	76	73
2	95	86	78	72	91	83	76	70	78	73	68	74	69	65	70	66	62	60
3	86	75	66	59	83	73	64	58	68	62	56	64	59	54	61	56	52	50
4	79	66	57	50	76	64	55	49	61	53	47	57	51	46	54	49	44	42
5	72	59	49	42	69	57	48	42	54	46	41	51	45	40	49	43	38	36
6	67	53	43	37	64	51	43	36	49	41	35	46	40	35	44	38	34	31
7	62	48	39	32	59	47	38	32	44	37	31	42	35	30	40	34	30	28
8	57	43	35	29	55	42	34	28	40	33	28	39	32	27	37	31	27	25
9	54	40	31	26	51	39	31	26	37	30	25	36	29	24	34	28	24	22
10	50	37	29	23	48	36	28	23	34	27	23	33	27	22	32	26	22	20

